

EGRO NEXT Top Milk with BEV-AIR Fridge

High Volume Super Automatic Espresso Machine

ESPRESSO MACHINE SPECIFICATIONS:

The NEXT is controlled by a 10.1" HD Android™ smart tablet user interface with a flexible and customizable operating system. Two self-adjusting grinders that make precise adjustments to the grind setting for consistent taste and volume in each cup, on each machine, and at each location. The NEXT is made of stainless steel and ABS plastic and features an easy 3-step automatic daily cleaning program.



STANDARD FEATURES:

- Super automatic with an app-controlled user interface
- HD Android smart tablet
- Self-adjusting grinders that automatically adjust the coffee grind size to compensate for environmental changes
- Single milk pump system
- Set different milk temperatures and textures for each drink
- Americano bypass enables machine to deliver authentic Americanos into a single cup
- Centralized hot water
- Requires only 12" of counter space
- Stainless steel 18-gram patented brewing
- Dual grinders by Ditting™
- Easy 3-step automatic daily cleaning program
- 2-year parts warranty

ACCESSORIES IN THE BOX:

- Plastic grounds bin container
- One-month supply of daily cleaning products
- Milk container
- Container for daily cleaning
- User manual
- Foot extensions

OPTIONS:

iSteam: Intelligent steam wand automatically froths and steams milk; shuts off at programmed temperature

Automatic Spout+: Automatically adjusts the dispensing spout to the correct cup size

External Hot Water Outlet: Hot water delivered through a separate outlet to the right of the drink spout

Self-Service Package: Includes locks for hopper, grounds drawer, and fridge, as well as cup stopper pins for the drink tray

Powder Module: Enables machine to deliver up to two types of powder, such as chocolate for mocha and hot chocolate

Cool Coffee Module: Rapidly cools coffee after brewing for best quality iced beverages (not available when the powder module is installed on the machine)

BC22: High-capacity 22 gram brew chamber allows for extra-large coffee drinks to be prepared in a single brew cycle


SPACE REQUIREMENTS:

- Allow 1.5" clearance on all sides of the machine.
- Allow space to fill bean hoppers from the top 4" minimum 12" preferred
- Allow 24" x 5" for in-line filter. Filter can be mounted behind the machine or under the counter.


EGRO NEXT Top Milk with BEV-AIR Fridge

High Volume Super Automatic Espresso Machine

BEV-AIR FRIDGE WTR27AHC-SR

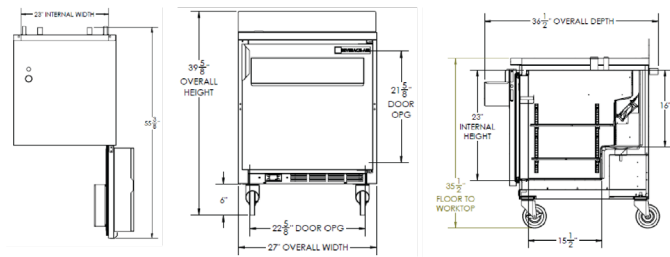

BEV-AIR FRIDGE UCR20HC

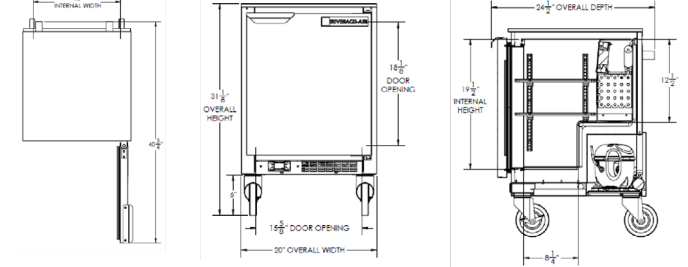

REFRIGERATOR SPECIFICATIONS:

Beverage Air refrigerators feature stainless steel front, top, sides, and doors. The interior liner is made from corrosion resistant aluminum and includes a built-in thermometer. Doors are self-closing with a 120° stay-open feature with cartridge style hinges. Two epoxy-coated steel wire shelves are standard.

The refrigeration system uses R290 refrigerant to comply with all environmental concerns. Evaporator is automatic and nonelectric with an epoxy coated evaporator coil. Refrigerators come specially pre-drilled for complete compatibility with Egro machines.

Beverage Air UCR20HC undercounter fridge can accommodate 2 gallons of milk and fits under most countertops.

Beverage Air WTR27AHC-SR can fit undercounter or can function as a workstation with the NEXT directly on top. It also includes a removable 4" backsplash and a speed rail for added convenience.

UNDER COUNTER REQUIREMENTS:

Width	Depth	Height	Weight
WTR27AHC-SR			
28"	34.5"	35.5"	160 lbs
Door at 90°: 56" (w/o backsplash)			
UCR20HC			
21"	24.5"	31.2"	110 lbs
Door at 90°: 41"			

SHIPPING DIMENSIONS AND WEIGHT: *estimated*

Length	Width	Height	Weight
WTR27AHC-SR			
48"	40"	35"	353 lbs
UCR20HC			
48"	40"	35"	300 lbs

BEV-AIR FRIDGE


Voltage Range: **110-120 VAC Single Phase**
 Watts: **200 W**
 Circuit Size: **15 amps**
 Suggested Receptacle: **5-15R GFI**

REFRIGERATOR STANDARD FEATURES:

- Stainless steel front, sides, and top
- Galvanized steel back and bottom
- Interior thermometer
- Aluminum door handle
- Two adjustable interior steel wire epoxy coated shelves
- R290 refrigerant metered by a capillary tube system
- 8 feet long cord and plug set included
- 6" casters, two with brakes standard

EGRO NEXT Top Milk with BEV-AIR Fridge

High Volume Super Automatic Espresso Machine

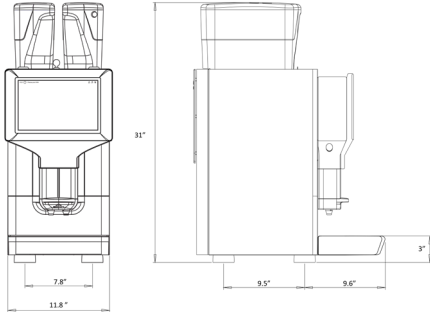


PLEASE NOTE: Power can be installed under or above counter. Please allow 3-4" of space for the plug, especially when placing power above the counter and behind the machine.

COUNTER REQUIREMENTS:

Width	Depth	Height	Weight
ESPRESSO MACHINE			
12"	23"	31"	126 lbs
with optional POWDER MODULE			
18"	23"	31"	154 lbs

SHIPPING DIMENSIONS AND WEIGHT:

Length	Width	Height	Weight
ESPRESSO MACHINE			
36"	36"	33"	155 lbs
with optional POWDER MODULE			
36"	36"	33"	240 lbs

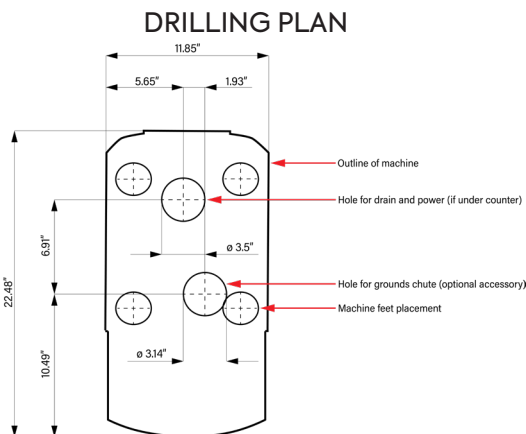


SERVICE CONNECTIONS:

Electrical Connections

ESPRESSO MACHINE

Voltage Range: 208-240 VAC Single Phase
 Watts: 6000 W
 Circuit Size: 30 amps
 Suggested Receptacle: NEMA L6-30R



optional POWDER MODULE

Voltage Range: 110-120 VAC Single Phase
 Watts: 200 W
 Circuit Size: 15 amps
 Suggested Receptacle: 5-15R GFI

PLEASE NOTE: Egro coffee machines do not use a neutral line. A dedicated ground wire is required for proper performance.

WATER CONNECTIONS:

Dedicated cold water access line with standard female 3/8" NPT fitting and manual shut-off valve within 4' of the machine required.

DRAIN REQUIREMENTS:

Open gravity drain rain with minimum 2" I.D. within 4' of the machine.

WATER QUALITY STATEMENT:

The fact that water is potable is no guarantee that it is suitable for coffee machines. Your water supply must be within these general guidelines:

SUPPLY PRESSURE: 30-70 psi
HARDNESS: 2-3 GPG (1 grain of hardness = 17.1 ppm)

Water entering the machine should have a water hardness level of 2-3 GPG at all times. If the water supply is not within this range, a dedicated water softener (if above 3 GPG) or mineral addition cartridge (if below 2 GPG) is required for the coffee machine to operate properly over time (see Rancilio Group North America Water Quality Statement for further details).