

EGRO ONE Top Milk Powder with UTC Fridge

High Volume Super Automatic Espresso Machine

ESPRESSO MACHINE SPECIFICATIONS:

The Egro ONE Top Milk is a high volume fully automatic espresso machine with a touchscreen user interface. It features a stainless steel 18-gram patented brew group with advanced sealing technology. This makes the brew group the most durable in its class, reduces maintenance needs, and lowers the cost of ownership. The ONE uses dual Ditting™ grinders with stainless steel burrs for quick and consistent grinding. The body of the machine features stainless steel and ABS plastic construction.



STANDARD FEATURES:

- Standard 5.7" full-color touchscreen graphical user interface enables up to 48 drink selections
- Single milk pump system
- Automatic milk frothing and delivery with a push of a button
- Americano bypass enables machine to deliver authentic Americanos into a single cup
- Lowest cost of ownership of any fully automatic with milk
- Centralized hot water
- Requires only 12" of counter space
- Stainless steel 18-gram patented brewing
- Dual grinders by Ditting™
- Daily milk cleaning cycle only requires the operator to add detergent
- 2-year parts warranty

ACCESSORIES IN THE BOX:

- Plastic grounds bin container
- One-month supply of daily cleaning products
- Milk container
- Container for daily cleaning
- User manual
- Foot extensions

The Powder Module allows the management of a great number of beverages in powder form. It is an external device positioned on the right hand side of the machine and consists of two hoppers that may be used with one type of powder or may operate independently with different water soluble powders like vanilla powder for vanilla flavored drinks or chai powder for chai lattes and teas.

OPTIONS:

iSteam: Intelligent steam wand automatically froths and steams milk; shuts off at programmed temperature

Self-Adjusting Grinder: Automatically adjusts the coffee grind size to compensate for environmental changes

External Hot Water Outlet: Hot water delivered through a separate outlet to the right of the drink spout

Self-Service Package: Includes locks for hopper, grounds drawer, and fridge, as well as cup stopper pins for the drink tray


SPACE REQUIREMENTS:

- Allow 1.5" clearance on all sides of the machine.
- Allow space to fill bean hoppers from the top 4" minimum 12" preferred
- Allow 24" x 5" for in-line filter. Filter can be mounted behind the machine or under the counter.


EGRO ONE Top Milk Powder with UTC Fridge

High Volume Super Automatic Espresso Machine

MILK PUMP UNIT DIMENSIONS

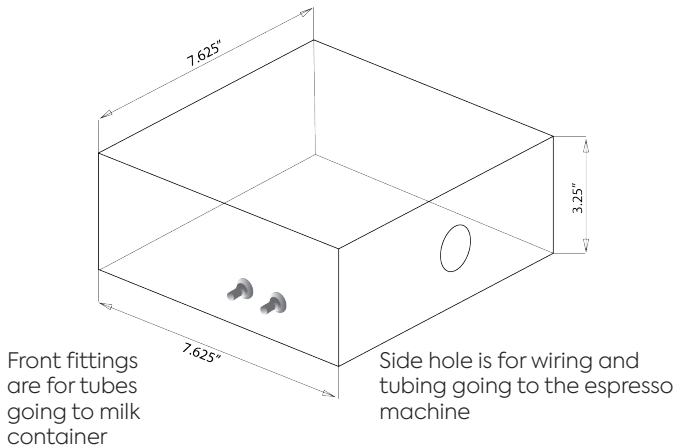

ONE TOP MILK with optional POWDER MODULE

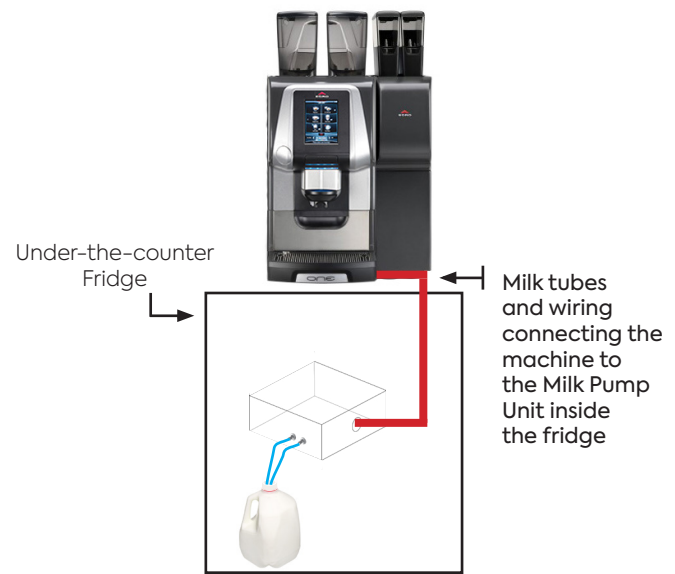

REFRIGERATOR SPECIFICATIONS:

Under-the-Counter Fridge must be professionally modified to include a 2.5" access hole on the top or side of the fridge for milk tubes and wiring connecting the machine to the Milk Pump Unit inside the fridge. It must be within 4 feet of the espresso machine.

The Milk Pump Unit is an external unit that can be placed in any under-the-counter refrigerator that has top access holes. It includes all the necessary components to pump milk to the machine for authentic lattes, cappuccinos and more. It includes milk tubes to be inserted into fresh milk gallons or other containers. It is designed to be placed on the refrigerator shelf with the milk placed beneath it.

COUNTER REQUIREMENTS:

Width	Depth	Height	Weight
ESPRESSO MACHINE with optional POWDER MODULE			
18"	23"	31"	154 lbs

SHIPPING DIMENSIONS AND WEIGHT:

Length	Width	Height	Weight
ESPRESSO MACHINE with optional POWDER MODULE			
36"	36"	33"	240 lbs

POWDER MODULE FEATURES:

- Two 2.6 lbs powder hoppers
- Perfect for a variety of water soluble powders
- Requires only 6" of counter space


optional POWDER MODULE

Voltage Range: 110-120 VAC Single Phase
Watts: **200 W**
Circuit Size: **15 amps**
Suggested Receptacle: **5-15R GFI**

PLEASE NOTE: Egro coffee machines do not use a neutral line. A dedicated ground wire is required for proper performance.

EGRO ONE Top Milk Powder with UTC Fridge

High Volume Super Automatic Espresso Machine

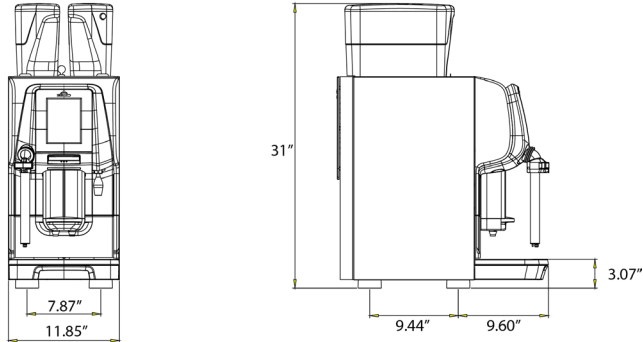

PLEASE NOTE: Power can be installed under or above counter. Please allow 3-4" of space for the plug, especially when placing power above the counter and behind the machine.


COUNTER REQUIREMENTS:

Width	Depth	Height	Weight
ESPRESSO MACHINE			
12"	23"	31"	126 lbs

SHIPPING DIMENSIONS AND WEIGHT:

Length	Width	Height	Weight
ESPRESSO MACHINE			
36"	36"	33"	165 lbs

DRILLING PLAN

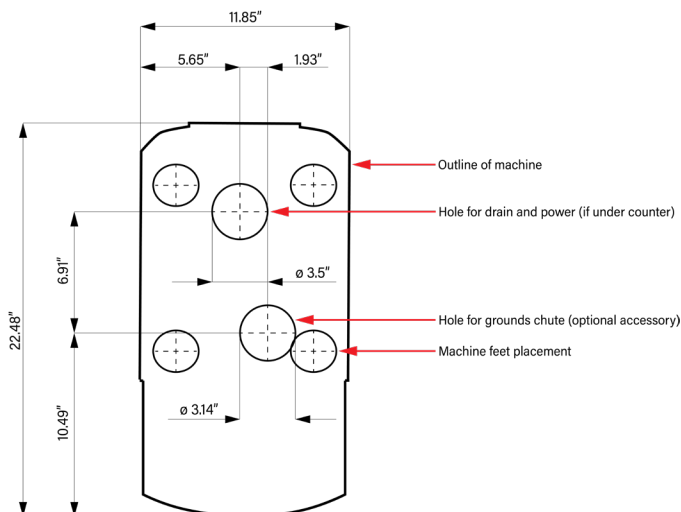

SERVICE CONNECTIONS:

Electrical Connections


ESPRESSO MACHINE

Voltage Range: 208-240 VAC Single Phase

Watts: 6700 W

Circuit Size: 30 amps

Suggested Receptacle: NEMA L6-30R



PLEASE NOTE: Egro coffee machines do not use a neutral line. A dedicated ground wire is required for proper performance.

WATER CONNECTIONS:

Dedicated cold water access line with standard female 3/8" NPT fitting and manual shut-off valve within 4' of the machine required.

DRAIN REQUIREMENTS:

Open gravity drain rain with minimum 2" I.D. within 4' of the machine.

WATER QUALITY STATEMENT:

The fact that water is potable is no guarantee that it is suitable for coffee machines. Your water supply must be within these general guidelines:

SUPPLY PRESSURE: 30-70 psi

HARDNESS: 2-3 GPG (1 grain of hardness = 17.1 ppm)

Water entering the machine should have a water hardness level of 2-3 GPG at all times. If the water supply is not within this range, a dedicated water softener (if above 3 GPG) or mineral addition cartridge (if below 2 GPG) is required for the coffee machine to operate properly over time (see Rancilio Group North America Water Quality Statement for further details).

