



RANCILIO CLASSE 5 S1 GROUP

ENTRY LEVEL TO MID RANGE TRADITIONAL ESPRESSO MACHINE



ESPRESSO MACHINE SPECIFICATIONS

The Classe 5 exemplifies functional minimalism combined with contemporary aesthetics. It features modern side panels, curved group covers and an ergonomic work area for comfort and convenience. The intuitive brew group control buttons are designed for instant interaction between the barista and the machine.

The Classe 5 is the combination of modern style and contemporary art in an espresso machine. Made from brushed stainless steel, ABS and nylon panels, the Classe 5 has sleek button for manual dosing control. The Classe 5 comes in Standard or Tall versions in Anthracite Black and Ice White. The Classe 5 ST1 or Classe 5 S Tank includes pour-over 2 liter water reservoir and drain basin. Discover functional minimalism with the Classe 5.

CLASSE 5 S SIDE PANEL



ESPRESSO MACHINE STANDARD FEATURES

- Made from brushed stainless steel, ABS and nylon panels
- Independent heat exchangers
- Electrical heating
- Built-in volumetric pump
- Boiler and pump pressure control gauge
- One manual steam wands for frothing and steaming milk
- C-Lever ergonomically designed steam hand features two positions, pulse steam (down) or steam fully on (up)
- Hot water outlet with manual valve knob control
- Scratch-proof polymer drain insert that can be removed and easily cleaned in dishwasher
- Adjustable feet
- 1-year parts warranty

ESPRESSO MACHINE OPTIONS

YouSteam: Barista assistance steam wand, adds air on-demand

Color Options: Anthracite Black and Ice White

ESPRESSO MACHINE STANDARD ACCESSORIES

- 1 Group - 1 double porta filters
- 2 Group - 2 double porta filters
- 3 Group - 3 double porta filters
- Plastic coffee tamper
- Rubber blind disks for cleaning
- User manual
- Foot extensions


ESPRESSO MACHINE DATA SPECIFICATIONS

- Weight:
73 lbs (1 Group)
- Power Supply:
110 - 120 V (1 Group)
- Power Rating:
1600 W (1 Group)



RANCILIO CLASSE 5 S1 GROUP

ENTRY-LEVEL TO MID RANGE TRADITIONAL ESPRESSO MACHINE

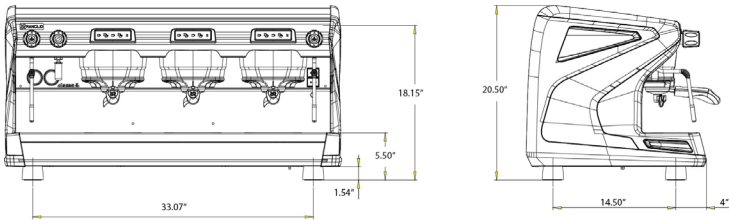

COUNTER-TOP REQUIREMENTS

1 GROUP

Width: 16" Depth: 22" Height: 21" Weight: 73 lbs

SHIPPING DIMENSIONS AND WEIGHT

1 GROUP

Length: 29" Width: 26" Height: 35" Weight: 16 lbs

CLASSE 5 SCRATCH PROOF DISHWASHER-SAFE GRID SYSTEM



SPACE REQUIREMENTS

Allow 1.5" of clearance on all sides of the machine.

Allow 24" x 5" of space for in-line filter. Filter can be mounted behind the machine or under the counter.

SERVICE CONNECTIONS

ELECTRICAL CONNECTIONS:

1 GROUP

Voltage Range: 110 - 120 V


Watts: 1600

Circuit Size: 15 amps

Suggested Receptacle:

15a GFI or 5-15R

Receptacle for Espresso Machine

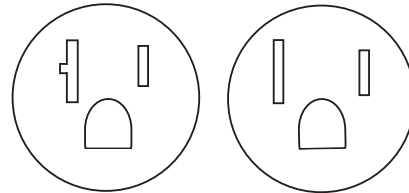

15a GFI

5-15R

PLEASE NOTE: Power can be installed under or above counter. Please allow 3.5" - 4" of space for the plug, especially when placing power above the counter and behind the machine.

WATER CONNECTION:

Dedicated cold water access line with standard female 3/8" NPT fitting and manual shut-off valve within 4' of the machine.

DRAIN REQUIREMENTS:

Open gravity drain with minimum 2" I.D. within 4' of the machine.

WATER QUALITY STATEMENT

The fact that water is potable is no guarantee that it is suitable for espresso machines. Your water supply must be within these general guidelines:

SUPPLY PRESSURE: 30-70 psi

HARDNESS: 2-3 GPG*

*17.1 ppm = 1 grain of hardness

Water entering the espresso machine should have a water hardness level of 2-3 GPG at all times. If the water supply is not within this range, a dedicated water softener is required for the espresso machine to operate correctly over time.